

09/856367

JC18 Rec'd PCT/PTO 22 MAY 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
REQUEST FOR FILING NATIONAL PHASE OF
PCT APPLICATION UNDER 35 U.S.C. 371 AND 37 CFR 1.494 OR 1.495

To: Hon. Commissioner of Patents
 Washington, D.C. 20231



00909

TRANSMITTAL LETTER TO THE UNITED STATES
 DESIGNATED/ELECTED OFFICE (DO/EO/US)

Atty Dkt: P 280285 /2980677US/HS/KP
 M# /Client Ref.

From: Pillsbury Winthrop LLP, IP Group:

Date: May 22, 2001

This is a **REQUEST** for **FILING** a PCT/USA National Phase Application based on:

1. International Application	2. International Filing Date	3. Earliest Priority Date Claimed
<u>PCT/FI99/00996</u>	<u>2 December 1999</u>	<u>11 December 1998</u>
<u>↑ country code</u>	Day MONTH Year	Day MONTH Year
		(use item 2 if no earlier priority)

4. Measured from the earliest priority date in item 3, this PCT/USA National Phase Application Request is being filed within:

(a) ☐ 20 months from above item 3 date (b) ☒ 30 months from above item 3 date,

(c) Therefore, the due date (unextendable) is June 11, 2001

Title of Invention CALL CONTROL IN INTELLIGENT NETWORK

Inventor(s) EIKKULA et al.

Applicant herewith submits the following under 35 U.S.C. 371 to effect filing:

☒ Please immediately start national examination procedures (35 U.S.C. 371 (f)).

☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2)) is transmitted herewith (file if in English but, if in foreign language, file only if not transmitted to PTO by the International Bureau) including:

a. ☒ Request;

b. ☒ Abstract;

c. 14 pgs. Spec. and Claims;

d. 2 sheet(s) Drawing which are ☐ informal ☒ formal of size ☒ A4 ☐ 11"

9. ☒ A copy of the International Application has been transmitted by the International Bureau.

10. A translation of the International Application into English (35 U.S.C. 371(c)(2))

a. ☐ is transmitted herewith including: (1) ☐ Request; (2) ☐ Abstract;

(3) _____ pgs. Spec. and Claims;

(4) _____ sheet(s) Drawing which are:

☐ informal ☐ formal of size ☐ A4 ☐ 11"

b. ☒ is not required, as the application was filed in English.

c. ☐ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.

d. ☐ Translation verification attached (not required now).

RE: USA National Phase Filing of PCT /FI99/00996

09/856367

JC13 Rec'd PCT/PTO 22 MAY 2001

11. ☒ Please see the attached Preliminary Amendment
12. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., before 18th month from first priority date above in item 3, are transmitted herewith (file only if in English) including:
13. ☒ PCT Article 19 claim amendments (if any) have been transmitted by the International Bureau
14. ☐ Translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., of claim amendments made before 18th month, is attached (required by 20th month from the date in item 3 if box 4(a) above is X'd, or 30th month if box 4(b) is X'd, or else amendments will be considered canceled).
15. **A declaration of the inventor** (35 U.S.C. 371(c)(4))
 a. ☒ is submitted herewith ☒ Original ☐ Facsimile/Copy
 b. ☐ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.
16. **An International Search Report (ISR):**
 a. Was prepared by ☒ European Patent Office ☐ Japanese Patent Office ☐ Other
 b. ☒ has been transmitted by the international Bureau to PTO.
 c. ☒ copy herewith (1 pg(s).) ☒ plus Annex of family members (1 pg(s).).
17. **International Preliminary Examination Report (IPER):**
 a. ☒ has been transmitted (if this letter is filed after 28 months from date in item 3) in English by the International Bureau with Annexes (if any) in original language.
 b. ☐ copy herewith in English.
 c.1 ☐ IPER Annex(es) in original language ("Annexes" are amendments made to claims/spec/drawings during Examination) including attached amended:
 c.2 ☐ Specification/claim pages #___ claims #___
 Dwg Sheets #___
 d. ☐ Translation of Annex(es) to IPER (required by 30th month due date, or else annexed amendments will be considered canceled).
18. **Information Disclosure Statement** including:
 a. ☒ Attached Form PTO-1449 listing documents
 b. ☒ Attached copies of documents listed on Form PTO-1449
 c. ☒ A concise explanation of relevance of ISR references is given in the ISR.
19. ☒ **Assignment** document and Cover Sheet for recording are attached. Please mail the recorded assignment document back to the person whose signature, name and address appear at the end of this letter.
20. ☐ Copy of Power to IA agent.
21. ☐ **Drawings** (complete only if 8d or 10a(4) not completed): __ sheet(s) per set: ☐ 1 set informal; ☐ Formal of size ☐ A4 ☐ 11"
22. Small Entity Status ☒ is **Not** claimed ☐ is claimed (pre-filing confirmation required)
 22(a) __ (No.) Small Entity Statement(s) enclosed (since 9/8/00 Small Entity Statements(s) not essential to make claim)
23. **Priority** is hereby claimed under 35 U.S.C. 119/365 based on the priority claim and the certified copy, both filed in the International Application during the international stage based on the filing in (country) FINLAND of:
- | | Application No. | Filing Date | | Application No. | Filing Date |
|-----|-----------------|------------------|-----|-----------------|-------------|
| (1) | 982694 | 11 December 1998 | (2) | | |
| (3) | | | (4) | | |
| (5) | | | (6) | | |
- a. ☒ See Form PCT/IB/304 sent to US/DO with copy of priority documents. If copy has not been received, please proceed promptly to obtain same from the IB.
 b. ☐ Copy of Form PCT/IB/304 attached.

RE: USA National Phase Filing of PCT/FI99/00996

24. Attached: See Preliminary Amendment

JC18 Rec'd PCT/PTO 22 MAY 2001

25 Per Item 17.c2, **cancel original** pages #__, claims #__, Drawing Sheets #**26. Calculation of the U.S. National Fee (35 U.S.C. 371 (c)(1)) and other fees is as follows:**Based on amended claim(s) per above item(s) ☐ 12, ☐ 14, ☐ 17, ☐ 25 (hilit)

Total Effective Claims	12	minus 20 =	0	x \$18/\$9	=	\$0	966/967
Independent Claims	2	minus 3 =	0	x \$80/\$40	=	\$0	964/965
If any proper (ignore improper) Multiple Dependent claim is present,				add \$270/\$135	+	0	968/969

BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(4)): →→ **BASIC FEE REQUIRED, NOW** →→→→A. If country code letters in item 1 are not "US", "BR", "BB", "TT", "MX", "IL", "NZ", "IN" or "ZA"

See item 16 re:

1. Search Report was <u>not prepared by EPO or JPO</u> -----	add \$1000/\$500		960/961
2. Search Report was prepared by EPO or JPO -----	add \$860/\$430	+860	970/971

SKIP B, C, D AND E UNLESS country code letters in item 1 are "US", "BR", "BB", "TT", "MX", "IL", "NZ", "IN" or "ZA"

→ <input type="checkbox"/> B. If USPTO did not issue <u>both</u> International Search Report (ISR) <u>and</u> (if box 4(b) above is X'd) the International Examination Report (IPER), -----	add \$1000/\$500	+0	960/961
→ <input type="checkbox"/> C. If USPTO issued ISR but not IPER (or box 4(a) above is X'd), -----	add \$710/\$355	+0	958/959
→ <input type="checkbox"/> D. If USPTO issued IPER but IPER Sec. V boxes <u>not all</u> 3 YES, -----	add \$690/\$345	+0	956/957
→ <input type="checkbox"/> E. If international preliminary examination fee was paid to USPTO and Rules 492(a)(4) and 496(b) <u>satisfied</u> (IPER Sec. V <u>all</u> 3 boxes YES for <u>all</u> claims), -----	add \$100/\$50	+0	962/963

SUBTOTAL = \$860

28. If Assignment box 19 above is X'd, add Assignment Recording fee of ----\$40 +40 (581)

29. Attached is a check to cover the ----- **TOTAL FEES \$900**

Our Deposit Account No. 03-3975

Our Order No. 60258 | 280285
C# M#

00909

CHARGE STATEMENT: The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 and 492 (missing or insufficient fee only) now or hereafter relative to this application and the resulting Official document under Rule 20, or credit any overpayment, to our Account/Order Nos. shown above for which purpose a duplicate copy of this sheet is attached.This CHARGE STATEMENT does not authorize charge of the issue fee until/unless an issue fee transmittal form is filed**Pillsbury Winthrop LLP**
Intellectual Property GroupBy Atty: Christine H. McCarthyReg. No. 41844Sig: [Signature]Fax: (202) 822-0944

Atty/Sec: CHM/JRH

Tel: (202) 861-3075**NOTE:** File in duplicate with 2 postcard receipts (PAT-103) & attachments.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re U.S. National Stage Application of PCT/FI99/00996

EIKKULA et al.

Group Art Unit: Not Yet Assigned

Appln. No.: Not Yet Assigned

Examiner: Not Yet Assigned

Filed: May 22, 2001

FOR: CALL CONTROL IN INTELLIGENT NETWORK

* * * * *

May 22, 2001

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents
Washington, DC 20231

Sir:

Before beginning examination, kindly amend this application as follows:

IN THE SPECIFICATION:

Following the Title, but before the first paragraph, please insert the following sentence:

This application is the National Phase of International Application PCT/FI99/00996 filed December 2, 1999 which designated the U.S. and that International Application was Published under PCT Article 21(2) in English.

IN THE CLAIMS:

Please amend the claims as follows:

1. (Amended) A method for producing an intelligent network service, in which method:

call control is divided into originating call control and terminating call control;

event handling of a call is controlled by an originating control record and a terminating control record, each control record having an operational connection to at least one intelligent network service control function for producing the intelligent network service; wherein a service or a portion thereof is determined in the originating control record to be a transferable service;

the transferable service is detected in the originating call control; an indication, which includes an expression of the detected transferable service, is transmitted from the originating call control to the terminating call control; and

an event related to the transferable service is set in the terminating call control as an intelligent network event that triggers the service.

2. (Amended) A method as claimed in claim 1, wherein the service is triggered on the terminating side in response to reception of said expression.

3. (Amended) A method as claimed in claim 1 wherein said expression is included in the indication that invokes the terminating call control.

4. (Amended) A method as claimed in claim 3, wherein at least one other terminating control record is determined and the control record to be invoked is selected on the basis of the expression included in the indication.

5. (Amended) A method as claimed in claim 1 wherein the service is the number portability service.

6. (Amended) A method as claimed in claim 5, wherein a dedicated terminating control record is determined for the number portability service, and it is selected to be the control record that is invoked in response to the number portability service expression included in the indication.

7. (Amended) A method as claimed in any one of the preceding claims, wherein control records are modelled with state models.

8. (Amended) An intelligent network service switching point, which is arranged to divide call control into originating call control and terminating call control, both call controls having an operational connection to at least one intelligent network service control function for producing an intelligent network service,

wherein the intelligent network service switching point is arranged to identify the service to be transferred from the originating call control to the terminating call control and to transfer the execution of the service to the terminating call control in response to the identification.

9. (Amended) An intelligent network service switching point as claimed in claim 8, wherein the originating call control is arranged to transmit an indication of the transferable service to the terminating call control in response to the identification, and the terminating call control is arranged to trigger the service in response to the indication.

10. (Amended) An intelligent network service switching point as claimed in claim 8 or 9, wherein the terminating call control is arranged to execute the terminating call control at least in two different ways, to select one of said ways expressed in the indication received

from the originating call control and to invoke the selected way in response to the reception of the indication.

11. (Amended) An intelligent network service switching point as claimed in claim 8 or 9, wherein the intelligent network service switching point is arranged to identify a service related to number portability as a transferable service.

12. (Amended) An intelligent network service switching point as claimed in claim 11, wherein the terminating call control is arranged to invoke the service in a node customized for the number portability service control in response to the transferred service.

REMARKS


By this Amendment, the specification is amended to include priority data and the claims are amended to merely clarify the recited invention. Consideration and allowance of the present application is respectfully requested. No new matter is introduced by this Amendment.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached Appendix is captioned "Version with markings to show changes made".

Applicant respectfully submits that the present application is in a condition for allowance and a Notice to that effect is earnestly solicited.

Respectfully submitted,

PILLSBURY WINTHROP LLP

By: 

Christine H. McCarthy

Reg. No.: 41,844

Tel. No.: (202) 861-3075

Fax No.: (202) 822-0944

CHM:jrh
1100 New York Avenue, NW
Ninth Floor
Washington, DC 20005-3918
(202) 861-3000

Enclosure: Appendix

3. (Amended) A method as claimed in claim 1 [or 2, characterized in that]

wherein said expression is included in the indication that invokes the terminating call control.

4. (Amended) A method as claimed in claim 3, [characterized in that] wherein at least one other terminating control record is determined and the control record to be invoked is selected on the basis of the expression included in the indication.

5. (Amended) A method as claimed in claim 1 [, 2 or 3, characterized in that] wherein the service is the number portability service.

6. (Amended) A method as claimed in claim 5, [characterized in that] wherein a dedicated terminating control record is determined for the number portability service, and it is selected to be the control record that is invoked in response to the number portability service expression included in the indication.

7. (Amended) A method as claimed in any one of the preceding claims, [characterized in that] wherein control records are modelled with state models.

8. (Amended) An intelligent network service switching point [(SSP)], which is arranged to divide call control into originating call control and terminating call control, both call controls having an operational connection to at least one intelligent network service control function for producing an intelligent network service, [characterized in that] wherein the intelligent network service switching point is arranged to identify the service to be transferred from the originating call control to the

APPENDIX

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE SPECIFICATION:

The specification has been amended as shown.

IN THE CLAIMS:

Please amend the claims as follows:

1. (Amended) A method for producing an intelligent network service, in which method:

call control is divided into originating call control and terminating call control;

event handling of a call is controlled by an originating control record and a terminating control record, each control record having an operational connection to at least one intelligent network service control function for producing the intelligent network service; [c h a r a c t e r i z e d i n t h a t] wherein a service or a portion thereof is determined in the originating control record to be a transferable service;

the transferable service is detected in the originating call control; an indication, which includes an expression of the detected transferable service, is transmitted from the originating call control to the terminating call control; and

an event related to the transferable service is set in the terminating call control as an intelligent network event that triggers the service.

2. (Amended) A method as claimed in claim 1, [c h a r a c t e r i z e d i n t h a t] wherein the service is triggered on the terminating side in response to reception of said expression.

terminating call control and to transfer the execution of the service to the terminating call control in response to the identification.

9. (Amended) An intelligent network service switching point [(SSP)] as claimed in claim 8, [c h a r a c t e r i z e d in that] wherein the originating call control is arranged to transmit an indication of the transferable service to the terminating call control in response to the identification, and the terminating call control is arranged to trigger the service in response to the indication.

10. (Amended) An intelligent network service switching point [(SSP)] as claimed in claim 8 or 9, [c h a r a c t e r i z e d in that] wherein the terminating call control is arranged to execute the terminating call control at least in two different ways, to select one of said ways expressed in the indication received from the originating call control and to invoke the selected way in response to the reception of the indication.

11. (Amended) An intelligent network service switching point [(SSP)] as claimed in claim 8[, 9] or 9 [10], [c h a r a c t e r i z e d by being] wherein the intelligent network service switching point is arranged to identify a service related to number portability as a transferable service.

12. (Amended) An intelligent network service switching point [(SSP)] as claimed in claim 11, [c h a r a c t e r i z e d in that] wherein the terminating call control is arranged to invoke the service in a node [(NPP)] customized for the number portability service control in response to the transferred service.

CALL CONTROL IN INTELLIGENT NETWORK

BACKGROUND OF THE INVENTION

The invention relates to services provided by an intelligent network and particularly to services provided on the terminating side of an intelligent network call.

A subscriber to a telecommunication network - a wired network or a mobile telephone network - can be provided with a variety of different services by the Intelligent Network (IN). The use of the Intelligent Network is based on call control and on the fact that the normal switching exchange connection arrangements and service control are separated from one another. ITU-T (International Telecommunications Union-Telecommunication Standardization sector) recommendation Q 1214 (10/95) describes a call setup arrangement, according to which exchanges supporting IN services comprise a basic call manager BCM. The basic call manager controls the basic call and the connection for providing the user with communication paths and interconnects these paths. BCM detects the events that can lead to invoking an IN service or that should be reported to an active IN service logic instance. The basic call manager BCM comprises a call-specific state model instance, a so-called basic call state model BCSM, which represents various phases of the call control and includes points where the call control can be interrupted in order to invoke an IN service. Additionally, BCM manages the use of exchange resources.

The IN call setup is divided into two sections: originating-side call setup and terminating-side call setup. The sections can also be called half-calls or call controls. The originating-side call control is associated with the services of a calling party, i.e. subscriber A, and the terminating-side call control is associated with the services of a called party, i.e. subscriber B. The originating-side call control is modelled with an originating basic call state model O_BCSM and the terminating-side call control is modelled with a terminating basic call state model T_BCSM. The terminating basic call state model is invoked when the originating basic call state model reaches a point in routing, in which a routing address and call type are interpreted and the next route is selected. Thereafter, the originating basic call manager sends information on the call attempt to the terminating basic call manager to be further processed by a setup message. Upon receiving the message, the terminating basic call manager invokes the terminating basic call state model. These basic

call state models interchange information by indications, but in the routing phase and while the call is active, the originating basic call state model does not send the terminating basic call state model other than the indication that a call has been attempted, which invokes the terminating basic call state model.

5 Interaction points, so-called detection points, are determined in the basic call state models, where event handling is either interrupted, information is sent to the IN service control function and instructions are awaited from the IN control function, or alternatively, only a notification of what has happened is sent to the IN service control function. An IN service is provided such that
10 when encountering service-related detection points, instructions are asked from the service control point. The first service-related query invokes at the control point a service logic program whose operation determines the instructions to be sent to the call control in order to provide a service.

 Services offered by means of IN increase and become more and
15 more versatile. A drawback with the above-described arrangement is that in feature interaction of various services, execution of another, simultaneous feature may be disturbed, since the services do not observe the difference in each other's features. Therefore, in some cases it would be advisable if a service detected in the originating half-call could be executed in the terminating half-call. In accordance with the prior art, this kind of a service cannot be
20 invoked in the terminating half-call, since it is not possible to transfer sufficiently data from one half-call to another. These services are often related to services of the subscriber B. For instance, when number portability is implemented as an IN service in the mobile systems, problems arise with other IN
25 service features, e.g. those developed for mobile telephone systems in accordance with CAMEL (Customised Applications for Mobile network Enhanced Logic) IN standard service facilities. The number portability means that the subscriber can change the operator and yet keep the old telephone number. In the present application the subscriber who has changed the operator but kept
30 the old number is referred to as a ported subscriber.

 There are situations, when it would be advisable for improved quality of service if the service logic, or a portion of it, which is normally invoked in the originating call model, is invoked on the terminating side. However, in the above-described arrangement this does not succeed, since the terminating
35 call model is only related to the services of the subscriber B.

BRIEF DESCRIPTION OF THE INVENTION

The object of the invention is to provide a method and equipment implementing the method such that the above problem can be solved. This is achieved with the method and an intelligent network service switching point, which are characterized by what is disclosed in the independent claims. The preferred embodiments of the invention are disclosed in the dependent claims.

The invention is based on the idea that at least a portion of functionality relating to a specific service is transferred from an originating half-call to a terminating half-call. In other words, a need to invoke a service that is more suitable for the terminating half-call is detected in the originating half-call, and as a result the service is invoked in the terminating half-call. For instance, alternative logic call state models are determined for this purpose, and an activation message, which invokes creation of a terminating call state model instance, indicates the call state model according to which the instance will be created. The service control point sees the logic call state models as different ones, even though, in reality, there is only one terminating call state model, which comprises for each transferable service at least a detection point that triggers a service. In the present application, the concept of transferable service refers to a service that is detected in the originating half-call but executed partly or completely in the terminating half-call. More precisely, a transferable service refers to that portion of the service detected in the originating half-call which will be executed in the terminating half-call.

An advantage with the method and switching point of the invention is that interaction problems can be minimized and the quality of some services can be improved, when the service, or a portion of it, can be executed in the terminating half-call.

In one preferred embodiment of the invention, information on a transferable service is sent in an indication that invokes the terminating-side call control. This has the advantage that information can be transmitted by current data transmission mechanisms and no new mechanisms are needed.

In one preferred embodiment of the invention, the transferable service is the number portability. Not invoking this service until in the terminating half-call the advantage is achieved that the originating half-call can be controlled from a different IN service control point than the terminating half-call such that instructions given by different control points need not interact. For

instance, the number portability service does not affect the subscriber B number which is seen in the originating half-call.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the invention will be described in greater detail in connection with preferred embodiments with reference to the attached drawings, in which

Figure 1 illustrates an intelligent network,

Figure 2 is a flow chart of originating-side call control in accordance with a first preferred embodiment of the invention,

Figure 3 is a flow chart of terminating-side call control in accordance with a first preferred embodiment of the invention,

Figure 4 shows a call state model associated with number portability.

DETAILED DESCRIPTION OF THE INVENTION

The invention and its background will be described in the following by using the CoreINAP terminology of the standard ETS 300 374-1, but the invention can also be applied to intelligent networks implemented by other IN standards, such as ANSI, AIN, WIN or CAMEL. In the present application, the intelligent network also refers to other application platforms providing services of corresponding type. Use of IN control principles means here that in a network node either event handling is interrupted, information is sent to IN service control function SCF and instructions are awaited from the IN control function, or alternatively, only information on what has happened is sent to the IN service control function SCF.

Figure 1 shows an intelligent network IN and a few examples of the relating telecommunication systems. Figure 1 shows elements and functions that are essential to the IN services. Network elements SSP1 and SSP2, which comprise a service switching function SSF and a call control function CCF, are called service switching points SSP. The call control function CCF is not an IN-related function, but it is a standard switching centre function comprising high-level call processing functions, such as establishment and release of transmission connections. The service switching function SSF is an interface between the call control function CCF and the service control function SCF. SSF interprets requests sent by SCF and forwards them to CCF, which starts the required call control functions. Correspondingly, the call control

function CCF uses SSF for asking instructions from SCF. SSF is tightly coupled to CCF whose interface it is. So each SSF together with CCF is located at the same switching centre. Within the scope of the present invention, the service switching point SSP is equal in value to the functional entity formed by CCF and SSF, and hereinafter the term SSP will be used. At the service switching point of the invention, at least two different terminating control records can be determined, one of which is of the prior art and the other is a control record customized to a service or services. One example of this is given in Figure 4. Together with the customized control record, or as an alternative thereto, various triggering detection points (or other corresponding events) can also be determined for the services that are desired to be executed on the terminating side. Triggering detection points are described in greater detail in Figure 4.

Network elements that include the service control function SCF are called service control points SCP. The service control function is a centralized authority in the intelligent network, which comprises an execution environment for service logic programs, among other things. Within the scope of the present application, SCF and SCP are equal in value, and hereinafter the term SCP will be used. In connection with an IN service, a service logic program is invoked at the service control point SCP, the operation of said program determining the instructions that SCP sends to SSP in each call step. Each program can have a plurality of instances to be executed. The service control point SCP of Figure 1 shows the service control point at its simplest, since it only comprises the service control function SCF and the necessary couplings.

Figure 1 also shows a node NPP (Number Portability Point) customized for the number portability service control, the node comprising a database NPD (Number Portability Data) and the necessary control functions for providing the number portability service. It is thus a kind of service control point and within the scope of the present application it is functionally equal in value with the service control point. The basic idea of the invention can also be implemented without customized nodes.

A service data function SDF is a database that SCF uses. The service logic programs can enquire and update SDF data. For instance, subscriber-specific or service-number-specific data can be stored in SDF. SDF can be either a database management system at the service control point

SCP, or, as shown in Figure 1, a separate database point SDP (Service Data Point) which supports the SCF-SDF interface and comprises a database DB.

A specialised resource function SRF of the intelligent network is an interface of such network mechanisms that are associated with subscriber interaction. SRF can be related to intelligent peripherals IP, which comprise more developed speech processing functions than the switching centres, or it can be located at the service switching point SSP.

Figure 1 further shows that one service switching point SSP1 comprises a function CCAF (Call Control Agent Function) that provides the users with access to the network. Since SSP1 comprises CCAF, it can be e.g. a local exchange of the wired network or a mobile services switching centre controlling a base station sub-system BSS of the mobile telephone network PLMN. CCAF can also be located at an exchange that does not have the service switching function SSF.

In Figure 1, the network elements are interconnected by means of a signalling network SS7. Also other networks, such as ISDN or IP, can be used.

The functionality of the invention can be implemented in current network elements, since they comprise processors and memory, by means of which it is possible to determine and program the detection of transferable services in the originating half-call, the transfer of information on the transferable service to the terminating half-call and the execution of service in the terminating half-call, for instance, utilizing various logic call state models. As it was stated earlier, the service control point sees the logic call state models as different ones, even though in reality there is only one terminating-side call state model which includes at least a service-triggering detection point for each transferable service.

Figure 2 illustrates operation of the originating call control in accordance with a first preferred embodiment of the invention. The starting point is step 201 where information collected from the subscriber is analysed for further call routing. In step 202, it is checked whether the collected information included a special number. A special number is a number associated with a predefined service. A predefined service is a transferable service, such as a number portability service, that is detected in the originating half-call but executed in the terminating half-call. A special number can be, for instance, the number of a ported subscriber B. A plurality of special numbers and services can be determined. If the information collected from the subscriber included a

special number, i.e. a number associated with a specific service, a service identification corresponding the special number is retrieved in step 203 and attached in step 204 to an indication that is sent to the terminating side in step 205. For instance, if the special number is the number of a ported subscriber B, a Mobile Number Portability Service Identification MNPSI is attached to the indication. The indication to be sent is preferably a call attempt indication, which invokes the terminating call control. Thereafter, feedback is awaited from the terminating side, for instance, information that the called party does not answer.

If the collected information did not include the special number, a direct transition from step 202 to step 205 is made in order to send the indication.

In the first preferred embodiment, information on a 'special case' is added to the call attempt indication, i.e. information on the service or a portion of it being executed in the terminating half-call. An advantage with this is that the existing indications can be utilized. In addition, when the indication remains in accordance with the prior art, it leads to using the prior art terminating basic call state model, whereas a changed indication leads to using another basic call state model. It is also possible to always include information on the call state model used in the indication, and consequently, when a prior art call state model is needed, a Normal Service Identification NSI, for example, is added to the indication.

In the example of Figure 2, the special case was detected on analysing the number. It could also be detected on the basis of the call origin, for instance. The use of number analysis for detecting special cases enables the use of a variety of methods for different number spaces. By means of the methods it is possible to control at what stage an IN service is invoked, for instance. A need for a number portability service can be detected at two different points. For instance, a Query on Release QoR list could comprise the numbers of own subscribers and/or number spaces from which some of the subscribers have moved over to another operator and kept their old numbers, and those numbers of other networks and/or number spaces whose subscribers may have moved over to another operator and kept their old numbers could be put on a Query on Digit Analysis QoD list. The subscriber on the QoR list invokes the IN service of 'number portability' only after the home location register has ceased to identify the subscriber. If the home location register

identifies the subscriber, the IN service is not invoked. The subscriber on the QoD list always invokes the IN service.

Figure 3 illustrates call control of the terminating-side in accordance with the first preferred embodiment of the invention. In step 301, an indication invoking the call state model is received and in step 302 it is checked whether the indication included a service identification. If the indication included the service identification, for instance MNPSI, it is investigated in step 303 which control record corresponds to the service identification and the control record indicated by the service identification is invoked in step 304. If the indication did not include the service identification, a prior art default control record is invoked in step 305. The invocation of the control record enables invocation of service-related service logic (at a detection point determined by the terminating state model), and later on, execution of the service logic at the service control point (or at a customized point comparable thereto).

In the embodiments, which only employ two different terminating-side control records, step 303 is not required at all, but the other control record that is not the default control record is invoked in step 304.

In the embodiments, in which the use of prior art control record is indicated, for instance, by adding NSI to the indication, checking in step 302 is not required and step 305 is included in step 304.

The flow charts of Figures 2 and 3 illustrate the invention and the principles presented therein can also be applied to other services than the number portability. The checks to be executed and their position in the flow chart naturally depend on how the special conditions are determined and what they are related to. A service can also be indicated indirectly by arranging a trigger detection point on the terminating side, for instance, with a dedicated indication message or with an indication message that invokes the terminating half-call. Detection points and arming are described in greater detail in Figure 4. On given conditions it is possible that the same call can invoke a plurality of simultaneous, different terminating-side call state models. However, the service control point detects these models as separate ones. For instance, if the subscriber B is not ported, i.e. his number is in the 'correct' number space of his operator, both the prior art default call control record and the control record determined to comprise the number portability can be invoked. The service control point detects these control records as separate ones, even though, from the viewpoint of the call control, they are one terminating control record.

Figure 4 shows an example of a terminating control record. It relates to the number portability. The example illustrates SSP actions during the terminating call processing. The description assumes that SSP is a mobile network switching centre of the Pan-European digital mobile system GSM (Global System for Mobile Communications) by which the actions in various points are described. It is further assumed that the service relating to the control record is the number portability. The control record is modelled with a call state model, in the same way as in the ITU-T recommendation Q 1214 a call control record is modelled in the switching point SSP with an originating basic call state model and a terminating basic call state model. The reason why the call has to be modelled is that in order to be able to control the call setup in SSP, SCP has to know the call phase. By means of modelling, both SSP and SCP implicitly know the call phases and potential interaction points, so-called detection points DP, in which SCP can affect the call. It is checked in detection points whether given conditions that are determined in the detection point are fulfilled. When a call attempt progresses to a detection point DP, the MSC/SSP makes an SCP enquiry in the following cases:

- DP is a trigger detection point TDP and triggering criteria are met (in other words, SSP can make an initial enquiry to SCP in a TDP detection point where it receives instructions for a call setup or for continuing the call setup. The trigger detection point is a point which can trigger transmission of an initial message in SSP, which message leads to invocation of the service logic in the service control point. A specific triggering condition can trigger only one service logic program at a time;

- DP is an event detection point EDP, in which SCP is interested. SCP gives instructions on EDPs to be reported for each call separately, in other words, it arms the detection points it is interested in.

There are two determined EDP and TDP types: 'Request' and 'Notification'. When SSP makes an SCP enquiry in a detection point DP of 'Request' type, the call processing must be interrupted and a reply from SCP must be awaited. In connection with 'Notification', SSP sends a notification in the detection point and does not interrupt the call processing nor awaits a reply.

In state models, the call processing procedures to be executed in SSP are roughly grouped in phases, which are called 'points in call' PIC. When a phase PIC ends, a detection point DP is generally encountered. The call setup or release can be temporarily interrupted in these detection points and

the service control point SCP can be asked for further call processing instructions. Call management can be transferred in these detection points to the service control point. When a transition is made from the detection point DP to the phase PIC, the call management moves over to the switching point. In addition to PICs and DPs, the basic call state model BCSM comprises transitions and events. The transitions indicate the flow of the basic call connection processing from one PIC to another. The events cause transitions into and out of the phase PIC. Different call state models of the same call (i.e. O_BCSM and T_BCSM) interchange information on the call process by indications. Information on a call attempt and how it is answered is mainly conveyed by means of said indications.

The call state model of Figure 4 shows the points in call, in which service logic instances of an operator-specific service are allowed to interact with the basic call control. In the example of Figure 4, the number portability is the operator-specific service, and the service logic instances are accessed through a service-related database NPD (Mobile Number Portability Database). In the following, the numeral refers to the point in call PIC or the detection point DP in Figure 4.

With reference to Figure 4, in PIC 4-1 of the call state model information on a call attempt is received (for instance, Initial Address Message IAM is received) and the information is analysed, a service identification MNPSI is received and analysed. Exit events of the point include either completing the MNPSI analysis, after which a transition to the detection point DP 4-6 is made, or encountering an exception event, after which a direct transition to PIC 4-5 is made. If an exception event is encountered in PIC 4-1, SCP is not notified thereof, since the corresponding detection point is missing.

There are two entry events of PIC 4-2 (T_HLR_Enquiry). The first one (through detection point DP 4-6) is: MNPSI is analysed and the telephone number of the called party, i.e. subscriber B, is not ported (i.e. the subscriber has not changed the operator keeping the number of his old operator). The second one is that DP 4-6 is not active and an enquiry from the home location register HLR, which maintains mobile network subscriber information, is necessary. In PIC 4-2, a routing data enquiry is sent to the home location register HLR. In the simplest model, it is the only action. Exit events of PIC 4-2 include an indication of the subscriber information being received from the home location register, an indication of the subscriber information not being received

from the home location register (for instance, information on the subscriber being unknown is received), the calling party terminates/abandons the call and finally an exit event of encountering an exception condition. If the subscriber information was received from the home location register, a transition to PIC 4-3 is made. If the subscriber information was not received from the home location register, a transition to DP 4-7 is made. If the calling party, i.e. subscriber A, abandons the call, a transition to PIC 4-1 is made. If an exception event is encountered, a direct transition to PIC 4-5 is made. If an exception event is encountered in PIC 4-2, SCP is not informed thereon either, since the corresponding detection point is missing. Exception events include all such failures that prevent said 'normal' exit events from being encountered.

There are four entry events in PIC 4-3 of the call state model (T_Terminating_Call_Handling): subscriber information received from the home location register is analysed (in PIC 4-2); detection point DP 4-6 is not active and an enquiry from the home location register HLR is not needed; MNSPI is analysed (in DP 4-6), the called party number is not ported and no enquiry from the home location register HLR is needed; MNSPI is analysed (in DP 4-6 and DP 4-7), the called party number is ported. In PIC 4-3 the response received from the home location register HLR (i.e. the subscriber information) is analysed. In addition, the routing address and the call type are interpreted and the next route, if necessary, will be selected. If the called party number is ported, a new terminating call control instance is invoked in order to find a route to the network of a new operator. In addition, the terminating party, i.e. subscriber B, is alerted and his answer to the call is awaited. Moreover, the GSM supplementary service of call forwarding is invoked, if necessary.

Exit events of PIC 4-3 include the following: the call is accepted and answered; the calling party terminates the call and an exception event is encountered. If the call is answered, a transition to PIC 4-4 is made. If the calling party terminates the call, a transition to PIC 4-1 is made. If an exception event is encountered, a direct transition to PIC 4-5 is made. If an exception event is encountered in PIC 4-3, SCP is not informed thereon, since the corresponding detection point is missing. Exception events comprise all such events that prevent said 'normal' exit events from being encountered.

An entry event of PIC 4-4 (T_Active) is an indication that the call is accepted and answered by the subscriber B. In PIC 4-4, a connection is established between the calling party and the called party. Call supervision is

provided and call release is awaited. Exit events of PIC 4-4 include receiving a disconnection indication from either one of the parties and encountering an exception event. If the disconnection indication is received, a transition to PIC 4-1 is made. If the exception event is encountered, a direct transition to PIC 4-5 is made. If the exception event is encountered in PIC 4-4, SCP is not informed thereon, since the corresponding detection point is missing. Exception events comprise all such failures that prevent the first mentioned 'normal' exit event from being encountered.

Entry events of PIC 4-5 (T_Exception) include encountering the above-described exception events. In addition, entry event include all such failures that prevent other exit events of the point from being encountered. The point provides default handling of error conditions, by means of which it is ensured that e.g. no resources will remain inappropriately allocated, that is to say, all unnecessary resources will be released. For instance, if there is a connection from SCP to the database NPD, information on the failure is transmitted, the connection is disconnected and it is indicated that none of the non-executed/uncompleted call handling instructions will be completed. SSP should utilize vendor-specific procedures to ensure in SSP that all lines and inter-exchange circuits are made available to new calls. The exit event of PIC 4-5 is that the default handling of exception conditions is completed. This leads to PIC 4-1.

Both detection points of the call state model illustrated in Figure 4 are trigger detection points and of the type R, i.e. Request. By means of the detection point 4-6 it is indicated that the reception point of the MNPSI service identification is encountered and MNPSI that is possibly received is analysed. By means of the detection point 4-7 it is possible to indicate that HLR did not find the necessary subscriber data in its database.

The call state model shown in Figure 4 illustrates only one possible solution and it is only related to one IN service. Said model is intended to illustrate establishment of service-specific IN models. The points described therein may also comprise other functions, more detection points can be determined, likewise more PICs can be added. It is obvious to the person skilled in the art that as technology progresses the basic idea of the invention can be implemented in a variety of ways. Thus the invention and its embodiments are not restricted to the above-described examples but they can vary within the scope of the claims.

CLAIMS

1. A method for producing an intelligent network service, in which method:

call control is divided into originating call control and terminating call control;

event handling of a call is controlled by an originating control record and a terminating control record, each control record having an operational connection to at least one intelligent network service control function for producing the intelligent network service;

characterized in that

a service or a portion thereof is determined in the originating control record to be a transferable service;

the transferable service is detected in the originating call control;

an indication, which includes an expression of the detected transferable service, is transmitted from the originating call control to the terminating call control; and

an event related to the transferable service is set in the terminating call control as an intelligent network event that triggers the service.

2. A method as claimed in claim 1, **characterized** in that the service is triggered on the terminating side in response to reception of said expression.

3. A method as claimed in claim 1 or 2, **characterized** in that said expression is included in the indication that invokes the terminating call control.

4. A method as claimed in claim 3, **characterized** in that at least one other terminating control record is determined and the control record to be invoked is selected on the basis of the expression included in the indication.

5. A method as claimed in claim 1, 2 or 3, **characterized** in that the service is the number portability service.

6. A method as claimed in claim 5, **characterized** in that a dedicated terminating control record is determined for the number portability service, and

it is selected to be the control record that is invoked in response to the number portability service expression included in the indication.

7. A method as claimed in any one of the preceding claims, **characterized** in that control records are modelled with state models.

8. An intelligent network service switching point (SSP), which is arranged to divide call control into originating call control and terminating call control, both call controls having an operational connection to at least one intelligent network service control function for producing an intelligent network service,

characterized in that

the intelligent network service switching point is arranged to identify the service to be transferred from the originating call control to the terminating call control and to transfer the execution of the service to the terminating call control in response to the identification.

9. An intelligent network service switching point (SSP) as claimed in claim 8, **characterized** in that

the originating call control is arranged to transmit an indication of the transferable service to the terminating call control in response to the identification, and

the terminating call control is arranged to trigger the service in response to the indication.

10. An intelligent network service switching point (SSP) as claimed in claim 8 or 9, **characterized** in that the terminating call control is arranged to execute the terminating call control at least in two different ways, to select one of said ways expressed in the indication received from the originating call control and to invoke the selected way in response to the reception of the indication.

11. An intelligent network service switching point (SSP) as claimed in claim 8, 9 or 10, **characterized** by being arranged to identify a service related to number portability as a transferable service.

12. An intelligent network service switching point (SSP) as claimed in claim 11, **characterized** in that the terminating call control is arranged to invoke the service in a node (NPP) customized for the number portability service control in response to the transferred service.

ABSTRACT:

A method and an intelligent network service switching point for transferring the execution of IN service related functionality from the originating half-call to the terminating half-call. For the functionality to be transferred, the service of a portion thereof is determined as a transferable service in the originating half-call. When the transferable service is encountered, information thereon is sent to the terminating half-call in which the service is triggered.

30180785V1

1/2

FIG. 1

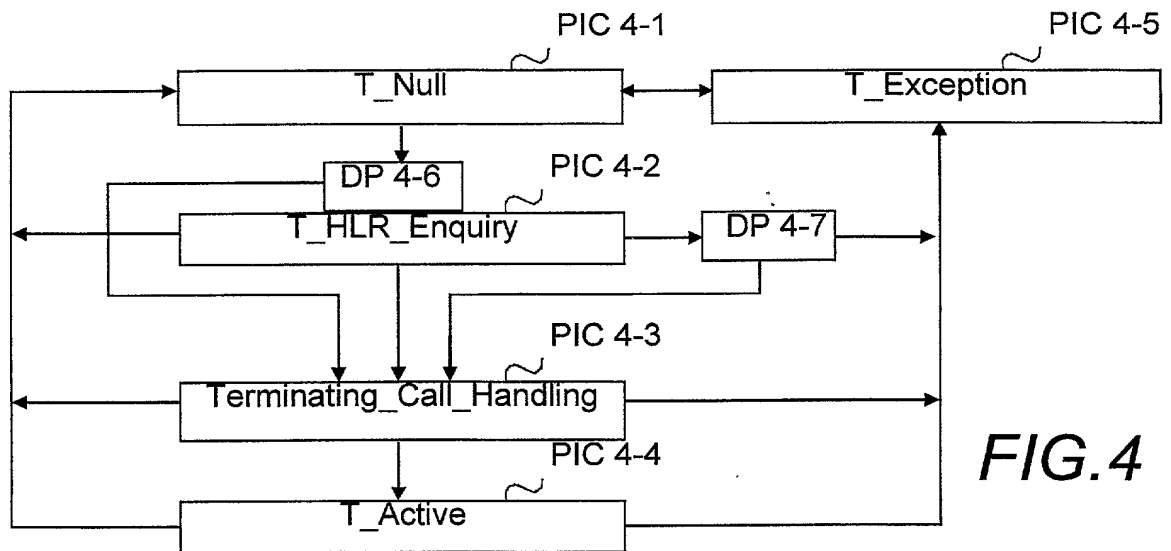
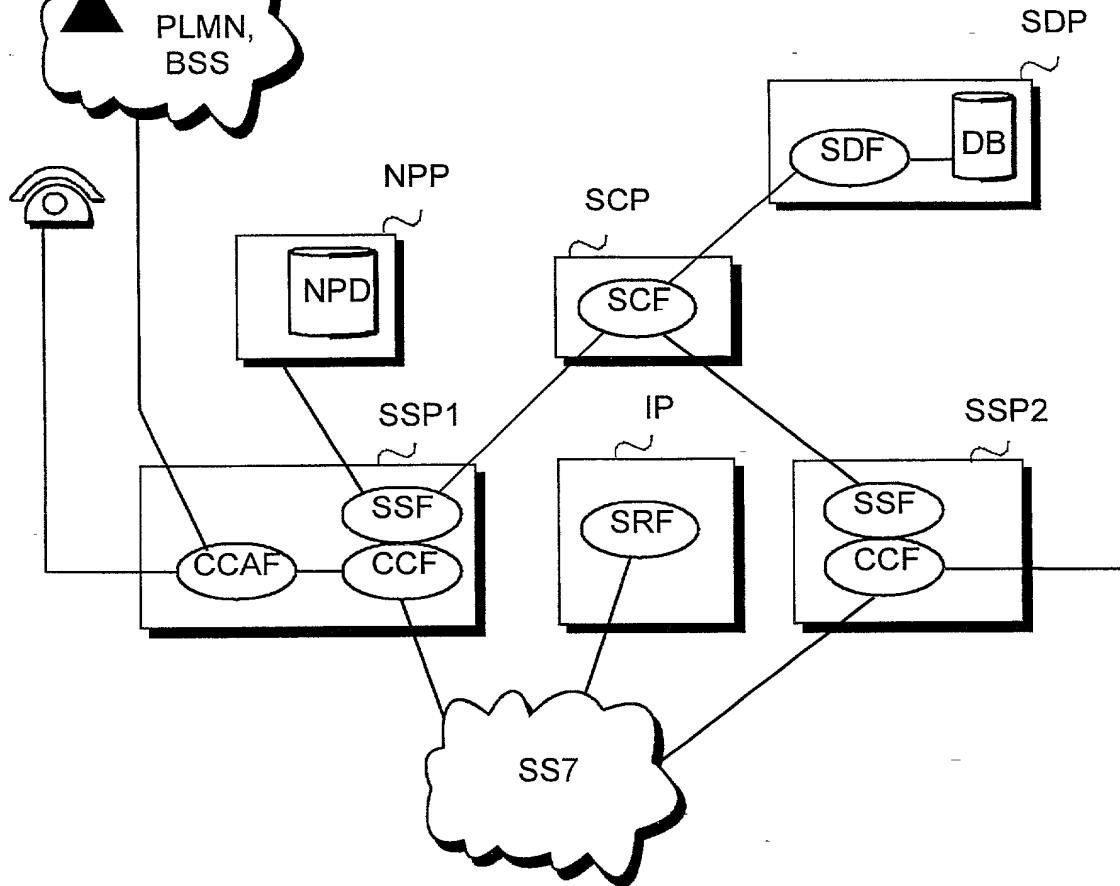
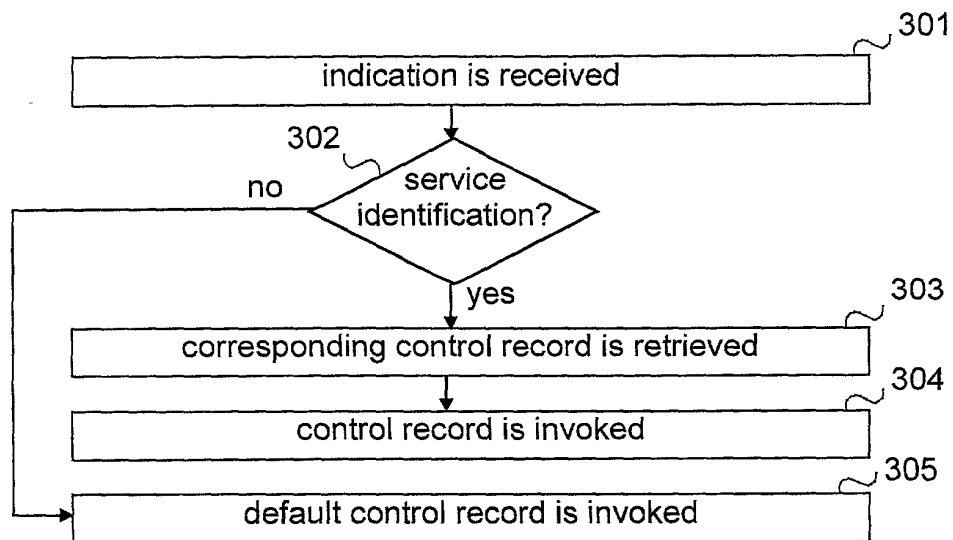
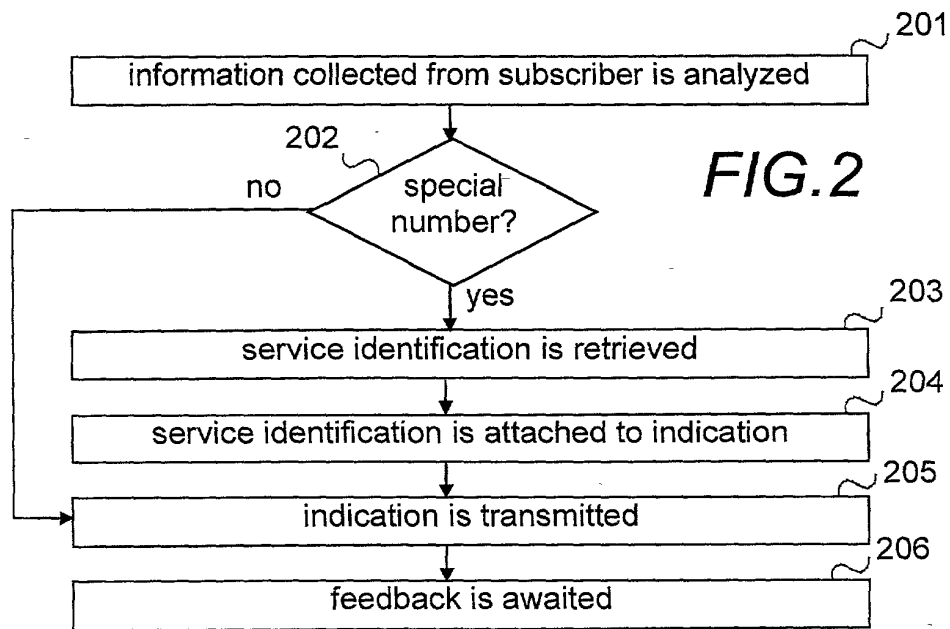


FIG. 4

2/2

**FIG. 3**

FOR UTILITY/DESIGN
CIP/PCT NATIONAL/PLANT
ORIGINAL/SUBSTITUTE/SUPPLEMENTA

L
DECLARATIONS

RULE 63 (37 C.F.R. 1.63)
DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PM & S
FORM

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the INVENTION ENTITLED
CALL CONTROL IN INTELLIGENT NETWORK

the specification of which (CHECK applicable BOX(ES))

X A. ☐ is attached hereto.
BOX(ES) B. ☐ was filed on _____ as U.S. Application No. _____ /
→ C. X was filed as PCT International Application No. PCT /F199 /00996 on 2 December 1999

and (if applicable to U.S. or PCT application) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56. Except as noted below, I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International Application which designated at least one other country than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International Application, filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing date of this application:

PRIOR FOREIGN APPLICATION(S)

Number	Country	Day/MONTH/Year Filed	Date first Laid-open or Published	Date Patented or Granted	Priority NOT Claimed
982694	Finland	11 December 1998			

If more prior foreign applications, X box at bottom and continue on attached page.

Except as noted below, I hereby claim domestic priority benefit under 35 U.S.C. 119(e) or 120 and/or 365(c) of the indicated United States applications listed below and PCT international applications listed above or below and, if this is a continuation-in-part (CIP) application, insofar as the subject matter disclosed and claimed in this application is in addition to that disclosed in such prior applications, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of each such prior application and the national or PCT international filing date of this application:

PRIOR U.S. PROVISIONAL, NONPROVISIONAL AND/OR PCT APPLICATION(S)

Application No. (series code/serial no.)	Day/MONTH/Year Filed	Status	Priority NOT Claimed
		pending, abandoned, patented	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

And I hereby appoint Pillsbury Winthrop LLP, Intellectual Property Group, 1100 New York Avenue, N.W., Ninth Floor, East Tower, Washington, D.C. 20005-3918, telephone number (202) 861-3000 (to whom all communications are to be directed), and the below-named persons (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorize them to delete names/numbers below of persons no longer with their firm and to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct the above firm and/or a below attorney in writing to the contrary.

Paul N. Kokulis	16773	Paul E. White, Jr.	32011	Stephen C. Glazier	31361	William P. Atkins	38821
Raymond F. Lippitt	17519	Glenn J. Perry	28458	Ruth N. Morduch	31044	Paul L. Sharer	36004
G. Lloyd Knight	17698	Kendrew H. Colton	30368	Richard H. Zaitlen	27248	Robin L. Teskin	35030
Kevin E. Joyce	20508	G. Paul Edgell	24238	Roger R. Wise	31204		
George M. Sirilla	18221	Lynn E. Eccleston	35861	Michael R. Dzwonczyk	36787		
Donald J. Bird	25323	Timothy J. Klima	34852	W. Patrick Bengtsson	32456		
Peter W. Gowdey	25872	David A. Jakopin	32995	Jack S. Barufka	37087		
Dale S. Lazar	28872	Mark G. Paulson	30793	Adam R. Hess	41835		

(1) INVENTOR'S SIGNATURE:

Date: 11.04.2001

Jari	First	Middle Initial	Family Name
EIKKULA			
Residence	Espoo	Finland	Finland
City	State/Foreign Country	Country of Citizenship	
Mailing Address	Krenatöörinkuja 1 O, FIN-02680 Espoo, Finland		
(include Zip Code)	02680 Espoo		

(2) INVENTOR'S SIGNATURE:

Date: 12.4.2001

Heikki	First	Middle Initial	Family Name
TUUNANEN			
Residence	Espoo	Finland	Finland
City	State/Foreign Country	Country of Citizenship	
Mailing Address	Nuijivuori 2 F 51, FIN-02630 Espoo, Finland		
(include Zip Code)	02630 Espoo		

"X" box ☐ FOR ADDITIONAL INVENTORS, and proceed on the attached page to list each additional inventor.

☐ See additional foreign priorities on attached page (incorporated herein by reference).

Atty. Dkt. No. PM